



## 8 SERIES: 8.4 TurboS

<http://tiny.cc/8seriesEN>**NEW**

**ACI**  
**ATTACHMENT**  
**CONTROL**  
**INTERFACE**

**C**RUISE  
**C**ONTROL


| Model  | 8.4 TurboS                                      |
|--|---|
| Engine   | Rehiko / Kohler KSD 1403 TCA, 3 cyl. - 1391 cc. |
| Emission Standards                             | Stage V and Tier 4 Final                        |
| Power (Iso Gross) / Torque                     | 25 HP / 120 Nm @ 1400 rpm                       |
| Fuel   | Diesel  |
| Transmission                                   | Hydrostatic OneDrive                            |
| Drive speed (max.) <sup>(1)</sup>              | 12,5 - 25 km/h (7.8 - 15.5 mph)                 |
| Aux. hydraulics oil flow                       | 74 l/min (19,5 GPM)                             |
| Max. lifting height                            | 2,98 m (117.3 in)                               |
| Tipping load, max. <sup>(2)</sup>              | 1840 kg (4056 lbs)                              |
| Lifting capacity straight, max. <sup>(3)</sup> | 1470 kg (3240 lbs)                              |
| Breakout force / 50 cm                         | 1700 kg (3748 lbs)                              |
| Pushing force (c)                              | 2050 kgf (2050 kp)                              |
| Average ground pressure (w/std tires)          | 1025 kg/m <sup>2</sup> (210 lbs/sqft)           |
| Turning radius: inside/outside                 | 825/2090 mm (32.5/82.3 in)                      |
| Standard tires (Tractor profile)               | 26X12.00-12 ET-50                               |
| Weight   | 1680 kg (3710 lbs)                              |
| Product Code                                   | <b>C963045</b>                                  |

<sup>(1)</sup> Maximum speed that can be achieved with the largest diameter tires available, on a flat surface and machine without attachments.

<sup>(2)</sup> Tipping limit, when the machine is straight, with rear weights and boom lifted just off the ground. Weight of attachment included.

<sup>(3)</sup> Maximum load that can be lifted just off the ground when the machine is straight and with rear weights. Weight of attachment is included.

Note: Refer to the Operator's manual for the comprehensive load diagram.

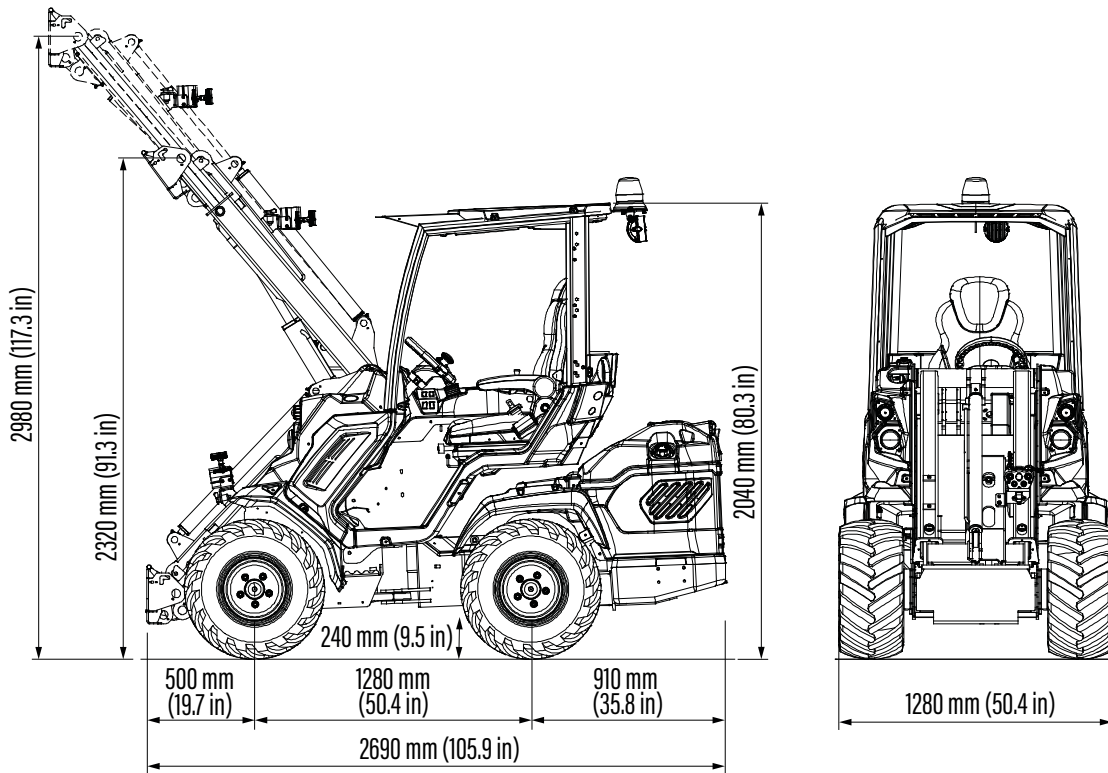

| Tires size        | Height            | Width             |
|-------------------|-------------------|-------------------|
| 23X8.50-12        | 2020 mm (79.5 in) | 1070 mm (42.2 in) |
| 23X10.50-12 ET-25 | 2020 mm (79.5 in) | 1130 mm (44.5 in) |
| 26X12.00-12 ET-50 | 2040 mm (80.3 in) | 1280 mm (50.4 in) |

## FEATURES

- Rehlko / Kohler KSD 1403 TCA, 3 cyl. -1391 cc, diesel engine water cooled, turbo intercooler, electronic injection system, electric start, glow plug
- Stage V and Tier 4 Final compliant engine
- **OneDrive System:** DBS (Dynamic Block System), Cruise Control and Torque Divider activated by Joystick
- ACI with Multifunction joystick (22 functions)
- Unbreakable Body Panels
- 2 Speed
- Hydraulically pilot operated variable displacement drive pump
- Self-locking multi-disk parking brake
- Hi-Flow system
- Integrated rear weights
- Self-levelling double-H telescopic boom
- Radial Piston high efficiency and heavy duty wheel motors
- 4WD hydrostatic Direct Drive motors, proportional servo control
- Hydraulic oil cooler
- Hydraulic multiconnector
- ROPS-FOPS Level I
- LCD graphic display with programmed service
- 2 front working lights
- Ergonomic fully adjustable suspension heated seat with armrests and seat belt
- ETC - Electronic Throttle Control

## 8 SERIES - OPTIONS

| Options   | Code    |
|---|---------|
| 110 V engine block heater   | C885255 |
| 220 V engine block heater   | C885250 |
| 2" Hitch receiver (not compatible with C883036 and C883066)                           | C883062 |
| 3 additional working halogen lights   | C883064 |
| 3 additional working LED lights   | C883018 |
| A/C system with heating for fully enclosed cab (C883001 required - not aftermarket)   | C883815 |
| Additional front hydraulic outlets  | C883024 |
| Attachment coupling plate for rear mounting (not compatible with C883036 and C883066) | C880031 |
| Automatic locking plate   | C880015 |
| Backup warning beeper   | C883021 |
| Beacon light  | C883039 |
| Driver area cover   | C880049 |
| Flat face coupling kit  | C880221 |
| Floating boom valve   | C883011 |
| Fully enclosed cab with sound insulation linen  | C883001 |
| GPS tracker   | C883075 |
| Heating system  | C883072 |
| Left protection bar for operator  | C883020 |
| Mirrors   | C880081 |
| Polycarbonate back window (smart cabin)   | C883035 |
| Polycarbonate right side (smart cabin)  | C883034 |
| Polycarbonate windscreen (smart cabin)  | C883000 |
| Rear 12V electric socket  | C883022 |
| Rear bull bar with side extensions (not compatible with C883062-C885014-C880031)      | C883036 |
| Rear hydraulic outlets - double for 8.4S K  | C883014 |
| Rear hydraulic outlets - single for 8.4S K  | C883013 |
| Rear side weights 80 kg (40 kg + 40 kg) / 176 lbs (88 lbs + 88 lbs)                   | C883069 |
| Rear side weights 160 kg (2x40 kg + 2x40 kg) / 352 lbs (2x88lbs+2x88lbs)              | C883077 |
| Rear weights 180 kg (90 kg + 90 kg) / 396 lbs (198lbs + 198 lbs)                      | C880054 |

## 8 SERIES - OPTIONS

| Options  | Code    |
|--|---------|
| Skid tires 27x10.50-15, set of 4                             | C884012 |
| Skid tires 27x8.50-15, set of 4                              | C884011 |
| Snow chains for wheels 23x10.50-12, set of 2                 | C880046 |
| Snow chains for wheels 23x8.50-12, set of 2                  | C880041 |
| Snow chains for wheels 26x12.00-12, set of 2                 | C880042 |
| Snow chains for wheels 27x8.50-15, set of 2                  | C880045 |
| Tie down bracket on wheel hub, set of 4                      | C883065 |
| Tractor tires 23x10.50-12 ET-25, set of 4                    | C884007 |
| Tractor tires 23x8.50-12, set of 4                           | C884005 |
| Tractor tires 26x12.00-12 ET-50, set of 4                    | C884009 |
| Trailer coupling (not compatible with C883036 and C883066)   | C885014 |
| Turf tires 23x10.50-12 ET-25, set of 4                       | C884008 |
| Turf tires 23x8.50-12, set of 4                              | C884006 |
| Turf tires 26x12.00-12 ET-50, set of 4                       | C884010 |
| Warning & Safety lights for road travel (with mirrors)       | C883009 |
| Wheel spacer 10 mm (0.4 in), set of 4 (max. 1 pcs for wheel) | C880090 |
| Wheel spacer 55 mm (2.2 in), set of 4                        | C885010 |
| EU Certificate of Conformity (CoC) for road approva          | COC     |